InterDiamant

A SENCO BRAND

Catalogue

DIAMOND TOOLS

INDEX

diamond saw blades 5

diamond drills 29

drill stands 51

diamond drilling motors 61

stone and tile saws 67

angle grinders, cutters and other tools 75

accessories 81

information 89

InterDiamant

A SENCO BRAND

A complete range of High Quality Diamond Tools

InterDiamant is a European brand with over 40 years' of history in Diamond Tools with in-house product development in diamond drilling tools, saw blades, drill rigs and diamond core drill bits. InterDiamant products are mainly produced at our Belgium facility KYOCERA SENCO Belgium and is sold by all companies of the Kyocera Senco Group.

Quality and Innovation

From practical experience we have learned that quality and innovation is the only way to success. At KYOCERA SENCO Belgium we choose to work with world class manufacturers to guarantee only the highest quality products.
Continuous research and development results in new and unique products.

A complete range to match your needs

Throughout our extensive range of diamond drilling tools, saw blades, drill rigs and diamond core drill bits we meet the highest quality and reliability demands of professional construction contractors.

Your InterDiamant expert

To ensure you get the service, support and technical expertise we have selected qualified dealers with knowledge, skills and service to "get it right first time".

InterDiamant

A **SENCO** BRAND



KYOCERA SENCO Belgium
Emiel van der Steenenstraat 3
1600 Sint-Pieters-Leeuw
België
T + 32 2 378 37 00
F + 32 2 378 37 21
info@kyocera-senco.be
www.kyocera-senco.be

InterDiamant
Ref. 144230
High-End
LIGNE 2000
Ø 230/22,2/12

1 SELECT THE MATERIAL

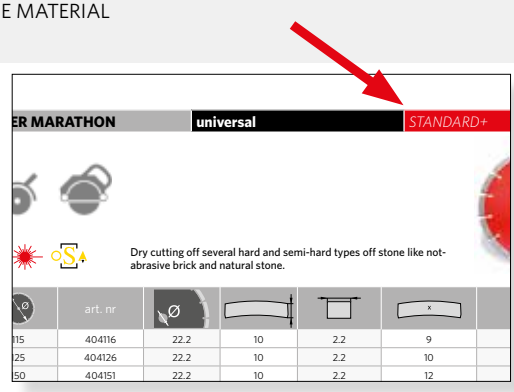

art. nr	Ø			x
404116	22.2	10	2.2	9
404126	22.2	10	2.2	10
404151	22.2	10	2.2	12

2 THE PRICE REFLECTS THE QUALITY
is proportional to the price you want to pay

HIGH-END Excellent quality with durability and the highest cutting speed. An investment in efficiency and durability.

PREMIUM High quality premium blade offering exceptional value for money.

STANDARD Standard quality blade.

+ *The "plus" indicator refers to premium quality in the range.*

3 DETERMINE BLADE AND ARBOR DIAMETER

Ø	art. nr	Ø
BLADE DIA. MM		**ARBOR DIA. MM**
350	325350	25.4
400	325400	25.4

MACHINE OPTIONS

cut-off saws

angle grinder

wall saw

slots saw

stone cutting saw table

floor saw

CHARACTERISTICS

wet cutting

dry cutting

dry and wet cutting

silent

laser welded blades: 100% guarantee against tooth fractures

European product

Organization for the Safety of Abrasives N°12371 - N°11840 - N°13236

LABEL

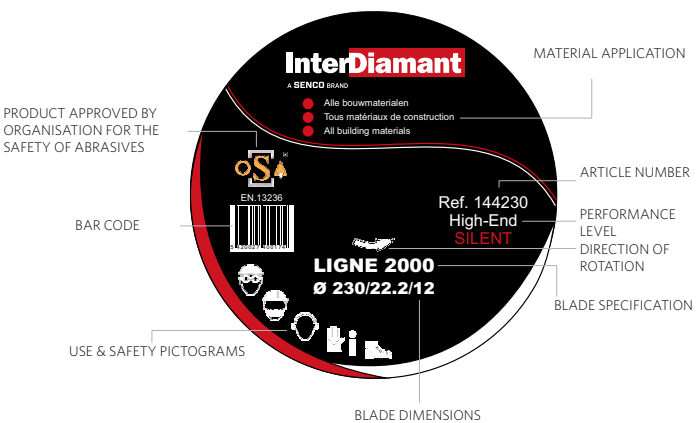

LASER CONCRETE | concrete | *HIGH-END+*

Dry cutting of reinforced concrete, gravel, tiles, pavement, extra hard brick as well as all building materials.

Ø	Ø			X	art. nr
125	22.2	12	2.4	10	350125
150	22.2	12	2.4	12	350150
180	22.2	12	2.4	14	350180
230	22.2	12	2.6	16	350230
300	20	12	2.8	20	350300
350	20	12	3.2	24	350350
350	25.4	12	3.2	24	350351
400	20.0	12	3.2	28	350400-1
400	25.4	12	3.2	28	350400
500	25.4	12	3.6	26	350500

10 x 230	22.2	12	2.6	16	PA350230

LASER ALLROUND | concrete and steel | HIGH-END

Dry cutting of all hard and medium-hard materials such as reinforced concrete and natural stone. Also suitable for iron sections, pipe material and other iron materials.

⌀	⌀			x	art. nr
230	22.2	7	2.4	18	143231

Ø 300 en 350 mm available on request

SILICATE | limestone | HIGH-END

Dry cutting of limestone, brick, abrasive materials.

⌀	⌀			x	art. nr
180	22.2	7	2.6	13	144181

LIGNE 2000 | universal | HIGH-END +

Dry cutting of all construction materials such as concrete, brick, stone, granite and other hard and medium hard stones.

⌀	⌀			x	art. nr
125	22.2	10	2.2	9	144126
230	22.2	12	2.8	16	144230

5 x 230	22.2	12	2.8	16	PA144230

LASER UNI | universal | HIGH-END

Dry cutting of various hard and medium hard rock types such as concrete, brick and stone.

⌀	Ø			x	art. nr
115	22.2	9	2.4	8	147115
125	22.2	9	2.4	9	147125
150	22.2	9	2.4	11	147150
150	30.0	9	2.4	11	147151
180	22.2	9	2.4	13	643180
230	22.2	9	2.6	16	642230
300	22.2	9	2.8	18	143300
300	25.4	9	2.8	18	143302
350	25.4	9	2.8	21	143350

UNI BLITS | universal | PREMIUM

Dry cutting of various hard and medium hard rock types such as non-abrasive brick and stone.

⌀	Ø			x	art. nr
115	22.2	10	2.3	8	305115
125	22.2	10	2.3	10	306125
150	22.2	10	2.4	12	307150
150	30.0	10	2.4	12	311150
180	22.2	10	2.4	14	308180
230	22.2	10	2.8	16	309230
250	22.2	10	2.8	20	310250
300	22.2	10	3.0	22	310300
300	30.0	10	3.0	22	310301
300	25.4	10	3.0	22	310302
350	25.4	10	3.2	24	310350

10 x 125	22.2	10	2.3	10	PA306125

10 x 230	22.2	10	2.8	16	PA309230

LASER MARATHON | universal | STANDARD+

Dry cutting of various hard and medium hard rock types such as non-abrasive brick and stone.

⌀	Ø			x	art. nr
115	22.2	10	2.2	9	404116
125	22.2	10	2.2	10	404126
150	22.2	10	2.2	12	404151
180	22.2	10	2.4	14	404181
230	22.2	10	2.5	16	404232
10 x 125	22.2	10	2.2	10	PA404126
10 x 230	22.2	10	2.5	16	PA404232

ECO | universal | BASIC

Dry cutting of various hard and medium hard rock types such as non-abrasive brick and stone.

⌀	Ø			x	art. nr
125	22.2	10	2.2	10	998125
230	22.2	10	2.4	16	998230

TURBO COOL | universal | *HIGH-END*

Dry cutting of various hard and medium hard rock types such as stone, natural stone, tiles and flooring.

⌀	Ø			x	art. nr
115	22.2	10	2.2	nvt	359116
125	22.2	10	2.4	nvt	359126
200	22.2	10	2.4	nvt	358202
200	30.0	10	2.4	nvt	358203
230	22.2	10	2.6	nvt	360231

TURBO PREMIUM | universal | *PREMIUM*

Dry cutting of various hard and medium hard rock types such as stone, natural stone, tiles and flooring.

⌀	Ø			x	art. nr
115	22.2	8	2.2	nvt	315115
125	22.2	8	2.2	nvt	316125
150	22.2	8	2.4	nvt	317150
180	22.2	8	2.4	nvt	318180
230	22.2	8	2.5	nvt	319230

TURBO FLANGE | universal | *PREMIUM*

Dry cutting of various hard and medium hard stones.

⌀	Ø			x	art. nr
230	14	13	2.5	nvt	319232

W2B | abrasive-brick | HIGH-END

Dry cutting of abrasive materials and sandy, soft stones such as sandy brick, aerated concrete and asphalt.

⌀	⌀			x	art. nr
115	22.2	9	2.4	8	142115
125	22.2	9	2.4	10	142125
150	22.2	9	2.4	11	142150
150	30.0	9	2.4	11	142151
180	22.2	9	2.4	13	142180
230	22.2	9	2.6	15	142230

VACUUM BRAZED | multifunctional

Multifunctional sheet developed for intervention services. Cutting in all materials!

⌀	⌀			x	art. nr
230	22.2	nvt	2.8	nvt	340231
300	25.4	nvt	3.1	nvt	340300
350	25.4	nvt	3.1	nvt	340350

DUOCOMPLETE | tubes

Blade designed for cutting and flattening all plastic pipes in one movement.

379132

⌀	⌀			x	art. nr
125	M14	nvt	2.5	nvt	379131
125	M14	nvt	2.5	nvt	379132

MARMER M3S | marble | HIGH-END

Wet cutting of marble.

⌀	Ø			x	art. nr
300	25.4	10	2.8	21	688300
350	25.4	10	3.2	25	689350
400	25.4	10	3.2	28	689400

BLUE STONE | blue stone | HIGH-END

Wet cutting of blue stone.

⌀	Ø			x	art. nr
230	22.2	7	2.4	18	690231
300	25.4	7	2.8	22	690300
350	25.4	7	3.2	26	691350

SUPER GRANITE | granite | HIGH-END

Wet cutting of granite.

⌀	Ø			x	art. nr
300	25.4	10	2.8	30	144300
350	25.4	10	3.0	34	144350
400	25.4	10	3.4	28	144401
500	25.4	10	3.6	36	144500
600	60	10	4.2	46	144600

TILECUTTER | tiles / ceramics | HIGH-END

Ceramic tiles, natural stone, slate, marble, granite, sidings eternit and porcelain.

Ø: 115-125

EXTRA THIN

Ø	Ø			x	art. nr
115	22.2	10	1.2	nvt	339115
125	22.2	10	1.2	nvt	339125
150	22.2	10	1.4	nvt	339150
180	22.2	10	1.4	nvt	339180
180	25.4	10	1.4	nvt	339181
230	22.2	10	1.6	nvt	339230
230	25.4	10	1.6	nvt	339231
250	22.2	10	2.0	nvt	339250
250	25.4	10	2.0	nvt	339251

10 x 125	22.2	10	1.2	nvt	PA339125

SPEEDCUTTER | tiles/ ceramics | PREMIUM +

Ceramic tiles, natural stone, slate, marble, granite, sidings eternit.

Ø: 115-125

Ø	Ø			x	art. nr
115	22.2	7	1.2	nvt	307115
125	22.2	7	1.2	nvt	307125
180	22.2	7	1.4	nvt	307180
180	25.4	7	1.4	nvt	307181
200	22.2	7	1.4	nvt	307200
200	25.4	7	1.4	nvt	307201
230	22.2	7	1.4	nvt	307230
230	25.4	7	1.4	nvt	307231

PORCELLANATO GRES tiles / ceramics HIGH-END+

Wet cutting of porcelain, ethernit, ceramic tile, marble and blue stone.

⌀	Ø			x	art. nr
230	25.4	10	2.2	nvt	143161
300	25.4	10	2.2	nvt	143162
350	25.4	10	2.4	nvt	143163

US-530 universal table saws HIGH-END+

Dry cutting of abrasive materials and sandy, soft stones such as sandy brick, limestone, aerated concrete.

⌀	Ø			x	art. nr
425	25.4	10	3.6	25	310425
450	25.4	10	3.6	25	310450
500	25.4	10	3.6	30	310500
600	30/25.4 *	10	4.0	35	310600
700	30/25.4 *	10	4.4	40	310700
900	25.4	10	4.4	48	310900

* incl. reductionrings

REDUCTIONRINGS

Ø		art. nr
22.2 -> 18 mm	1.8	619022
22.2 -> 16 mm	1.8	619023
22.2 -> 20 mm	1.8	619013
22.2 -> 20 mm	2.2	619014
25.4 -> 22.2 mm	2.2	619015
25.4 -> 20 mm	2.2	619016
30 -> 25.4 mm	2.2	619017
30 -> 22.2 mm	2.2	619018
30 -> 20 mm	2.2	619019
25.4 -> 20 mm	7.0	619020
25.4 -> 22.2 mm	7.0	619021

CONCRETE STANDARD | concrete | STANDARD

Wet or dry cutting of (reinforced) concrete, granite, gravel, tiles, pavers, extra hard brick and other hard stones.

⌀	Ø			x	art. nr
300	25.4	10	3.2	24	2174349
350	25.4	10	3.2	24	2174350
350	20.0	10	3.2	24	2174351
400	25.4	10	3.2	28	2174400
400	20.0	10	3.2	28	2174401

CONCRETE SUPER | concrete | HIGH END

Wet or dry cutting of (reinforced) concrete, granite, gravel, tiles, pavers, extra hard brick and other hard stones.

⌀	Ø			x	art. nr
300	20	15	3	21	217010
300	25.4	15	3	21	217014
350	20	15	3.2	24	217011
350	25.4	15	3.2	24	217015
400	25.4	15	3.2	28	217013

COMBI-CUT | concrete / asphalt | HIGH END

Wet or dry cutting of concrete and asphalt.

⌀	Ø			x	art. nr
300	25.4	10/15	3.2	24	216600IF
350	25.4	10/15	3.2	24	216601
400	25.4	10/15	3.2	28	216602

HS-530 | concrete | HIGH END

Dry cutting of concrete.

⌀	Ø			x	art. nr
300	25.4	9	2.8	20	341300
350	25.4	9	3	24	341350
400	25.4	9	3.2	28	341400

W5TS | asphalt | HIGH-END

Wet or dry cutting of asphalt.

⌀	Ø			x	art. nr
300	25.4	7	2.8	18	145300
350	25.4	7	3.2	21	145350
400	25.4	7	3.2	24	145400
450	25.4	7	3.6	25	145450
500	25.4	7	3.6	30	145500
600	25.4	7	4.0	35	145600

ASX8 ASFALT | asphalt | STANDARD

Wet or dry cutting of asphalt, limestone and porous concrete.

⌀	Ø			x	art. nr
300	20.0	10	2.8	18	121320
300	22.2	10	2.8	18	121322
300	25.4	10	2.8	18	121300
350	20.0	10	3.2	21	128351
350	22.2	10	3.2	21	128352
350	25.4	10	3.2	21	128350
400	25.4	10	3.2	24	128400
500	25.4	10	3.6	30	128500

CONCRETE | concrete | HIGH-END

Wet or dry cutting of (reinforced) concrete, gravel tiles and pavers.

⌀	Ø			x	art. nr
13PK-13HP					
350	25.4	10	3.2	24	326350
400	25.4	10	3.6	28	327400
450	25.4	13	3.6	32	350451
500	25.4	13	3.6	36	350501
>20PK/HP-30PK/HP					
600	25.4	10	4.0	42	325600
700	25.4	10	4.0	48	325700
>60PK/HP-80PK/HP					
600	25.4	13	4.0	42	325601
800	25.4	13	4.8	48	325801

CONCRETE | concrete | HIGH-END

Hydrostres and Hilti universal. Wet or dry cutting of reinforced concrete with very high efficiency.

⌀	Ø			x	art. nr
>15-35 PK/HP					
600	60	10	4.4	46	328601IF
800	60	10	4.4	46	328800
OTHER DIAMETERS AND OUTPUTS AVAILABLE ON REQUEST					

TOP BLUE | soft joints | HIGH-END

Cutting out soft and sandy joints.

⌀	Ø			art. nr
115	22.2	7.5	7.5	678115
125	22.2	7.5	7.5	679125
ZMF 125	22.2	7.5	2.4	373126

TOP RED | hard joints | HIGH-END

Grinding of hard and medium hard joints.

⌀	Ø			art. nr
115	22.2	7.5	7.5	678116
125	22.2	7.5	7.5	679126
ZMF 125	22.2	7.5	2.4	373127

PREMIUM | universal | PREMIUM

Grinding of hard and medium hard joints.

⌀	Ø			art. nr
115	22.2	9	6.5	372115
125	22.2	9	6.5	373125
180	22.2	9	6.5	374180

DUSTER — HIGH-END

Grinding concrete and other hard materials.

⌀	Ø	art. nr
125	22.2	690125IF
175	22.2	690180

PREMIUM DOUBLE — PREMIUM

Grinding concrete and other hard materials.

⌀	Ø	art. nr
115	22.2	380115
125	22.2	381125
180	22.2	382180

RAPCOL

HIGH-END

Quickly remove adhesive residue.

⌀	Ø			art. nr
125	22.2	nvt	nvt	373128

MULTI CUTTER

HIGH-END

Cutting and polishing tiles and natural stone.

⌀	Ø	art. nr
125	M14	691125

ID 10 | stainless steel | HIGH-END

Extra thin high-end cutting disc
for stainless steel. High efficiency.

⌀	⌀			art. nr
115	22.2	1.0	50	8206162
125	22.2	1.0	50	8206163
230	22.2	1.9	30	8206260

ID 20 | steel | HIGH-END

Extra thin high-end cutting disc
for carbon steel. High efficiency.

⌀	⌀			art. nr
115	22.2	1.0	50	8206170
125	22.2	1.0	50	8206171
230	22.2	1.9	30	8206266

ID 33 - IDK 33 | steel and stainless steel | PREMIUM

Medium-hard cutting disc for construction and structural steel with high tensile strength, alloy and high-alloy stainless steel.

⌀	Ø			art. nr
125	22.2	3	25	8200891
230	22.2	3	25	8200807

ID 80 - IDK 80 | steel | PREMIUM

Medium-hard disc low tensile strength steel.

⌀	Ø			art. nr
115	22.2	3	25	8200631
125	22.2	3	25	8200636
230	22.2	3	25	8200550

ID 33 | steel | PREMIUM

Medium-hard disc for all metals with low material loss.

⌀	Ø			art. nr
350	25.4	2.5	10	8201518
350	25.4	4	10	8201187

ID 67 | **steel** | *HIGH-END*

Low temperature abrasive grinding disc with open structure.
Wide range of applications.

⌀	⌀			art. nr
125	22.2	6	10	8200141
230	22.2	6	10	8205718

ID F1 steel and stainless steel *HIGH-END*

Conical flap disc with high zirkonkorund for heavy machining. Glass fabric carrier. Iron and sulfur free.

⌀	⌀			art. nr
125	22.2	40	5	8202735
125	22.2	60	5	8202742
125	22.2	80	5	8202749
125	22.2	120	5	8202756

ID F2 steel and stainless steel *PREMIUM*

Conical flap disc with high zirkonkorund for heavy machining. Glass fabric carrier. Iron and sulfur free.

⌀	⌀			art. nr
125	22.2	40	5	8204015
125	22.2	60	5	8204018
125	22.2	80	5	8204021

VISION steel and stainless steel *HIGH-END*

Conical flap disc with high zirkonkorund for heavy machining. Glass fabric carrier. Iron and sulfur free.

⌀	⌀			art. nr
125	22.2	40	10	207077
125	22.2	60	10	207078
125	22.2	80	10	207079

ID 85 steel HIGH-END

Metal blades with carbide teeth to achieve a better use of the portable and stationary circular saws. Very long life with perfect cutting quality. Fast cutting without burrs and cooling means. Thin-walled blades and noiseless operation.

Ø	Ø	x	art. nr
180	30.0	34	500001
190	30.0	48	500002
230	25.4	44	500003
230	30.0	44	500004
305	25.4	60	500005
305	25.4	80	500006
355	25.4	90	500007

ID 86 stainless steel HIGH-END

Metal blades with carbide teeth to achieve a better use of the portable and stationary circular saws. Very long life with perfect cutting quality. Fast cutting without burrs and cooling means. Thin-walled blades and noiseless operation.

Ø	Ø	x	art. nr
250	25.4	60	500009
355	25.4	90	500008IF

The InterDiamant diamond drill range is the result of 30 years experience and close relationships with customers throughout Europe.
Our specifications are developed and continually improved to ensure very high quality products that are optimized for most applications. The most demanding users will find suitable equipment in our assortment. We can also produce different diameters and lengths on request according to the customer requirements.

SPEED RECORD!
2 minutes and 38 seconds
20 cm reinforced concrete
up to the end of the drill

1 CHOOSE THE TYPE OF DRILL

Sprint (wet)
Drill type specially developed for drilling into reinforced concrete.
The performance characteristics are excellent resulting in very high speed. We also recommend the 1/2" version of this drill for hand drilling into concrete.

Marathon (wet)
This drill type has been developed for reinforced concrete with river pebbles or rebar. They have an exceptionally long life and operate equally well with abrasive materials and in regular concrete. High powered motors create no operating problems with this drill type.

Granito (wet)
This drill has been developed for drilling in stone and ceramic materials.

Sprint (dry)
This drill is designed for dry drilling into brick and drywall and offers exceptionally value for money.

Marathon (dry)
Marathon dry drills are suitable for dry drilling holes in various materials including silicate. This system employs dust holes as standard which provides a cooler sleeve in operation and the drill to block or jam. The 5/4" doesn't have dust holes as it is equipped to drill with dust extraction.

OSCILLATOR (dry)
A combination of the completely new dry drilling system with a corresponding motor engine makes dry and dust-free work in reinforced concrete possible.
Particularly when it comes to finished environments and carrying out renovations. work, drilling spots etc. It can now be done without having to mess around with dirty drainage and waste.

2 CHOOSE THE RIGHT CONNECTION



1/2"
5/4"
M16

BIT CONNECTOR

3 DIFFERENT QUALITIES

HIGH-END The absolute top class with the longest life time and highest drilling speed.

PREMIUM High quality with above average service life and a perfect balance between price and drilling results.

4 CHOOSE THE RIGHT SIZE



DIAMETER



NUMBER OF SEGMENTS - SEGMENT SIZE

MACHINE OPTIONS

drill stand

CHARACTERISTICS

wet drilling

dry drilling

dry and wet drilling

Eurpoean produced product

MARATHON M16

HIGH-END

DRILL BOX WITH SLOTS

Dry drilling of various building materials except very hard materials like (reinforced) concrete.

Ø				art. nr
Ø 31 mm	M16	60 mm	4 seg. 10 mm	600031
Ø 41 mm	M16	60 mm	4 seg. 10 mm	601041
Ø 57 mm	M16	60 mm	4 seg. 10 mm	602056
Ø 62 mm	M16	60 mm	4 seg. 10 mm	602061
Ø 68 mm	M16	60 mm	4 seg. 10 mm	603068
Ø 72 mm	M16	60 mm	4 seg. 10 mm	604071
Ø 82 mm	M16	60 mm	4 seg. 10 mm	605081
Ø 92 mm	M16	60 mm	4 seg. 10 mm	606091
Ø 102 mm	M16	60 mm	5 seg. 10 mm	607101
Ø 112 mm	M16	60 mm	5 seg. 10 mm	607112
Ø 122 mm	M16	60 mm	5 seg. 10 mm	608121
Ø 132 mm	M16	60 mm	5 seg. 10 mm	608132

Ø 31 mm	M16	150 mm	4 seg. 10 mm	6000312
Ø 41 mm	M16	150 mm	4 seg. 10 mm	6010412
Ø 57 mm	M16	150 mm	4 seg. 10 mm	6020562
Ø 62 mm	M16	150 mm	4 seg. 10 mm	6020612
Ø 68 mm	M16	150 mm	4 seg. 10 mm	6030682
Ø 72 mm	M16	150 mm	4 seg. 10 mm	6040712
Ø 82 mm	M16	150 mm	4 seg. 10 mm	6050812
Ø 92 mm	M16	150 mm	4 seg. 10 mm	6060912
Ø 102 mm	M16	150 mm	5 seg. 10 mm	6071012
Ø 112 mm	M16	150 mm	5 seg. 10 mm	6071122
Ø 122 mm	M16	150 mm	5 seg. 10 mm	6081212
Ø 132 mm	M16	150 mm	6 seg. 10 mm	6081322

LASER STANDARD M16 | STANDARD

DRILL BOX WITH SLOTS

All hard and medium hard rock types except (reinforced) concrete.

⌀			art. nr
Ø 82 mm	60 mm	4 seg. 7 mm	609186

LASER UNIVERSEL M16 | PREMIUM

DIAMOND DRILL WITH GROOVED DUST EXTRACTION SLOTS

Dry drilling of various construction materials except very hard materials like (reinforced) concrete.

⌀				art. nr
Ø 68 mm	M16	60 mm	4 seg. 9 mm	609184
Ø 82 mm	M16	60 mm	4 seg. 9 mm	609182
Ø 102 mm	M16	60 mm	5 seg. 9 mm	609189
Ø 112 mm	M16	60 mm	5 seg. 9 mm	609190

Dust extraction M16 (Drill dry box)	609100

Dust extraction system M16 quicksysteem	609101

MARATHON 1/2" | HIGH-END

Dry drilling of various building materials, except for very hard materials like (reinforced) concrete.

⌀				art. nr
Ø 30 mm	R 1/2"	400 mm	4 seg. 10 mm	840002
Ø 36 mm	R 1/2"	400 mm	4 seg. 10 mm	840004
Ø 41 mm	R 1/2"	400 mm	4 seg. 10 mm	840005
Ø 46 mm	R 1/2"	400 mm	4 seg. 10 mm	840006
Ø 51 mm	R 1/2"	400 mm	4 seg. 10 mm	840007
Ø 56 mm	R 1/2"	400 mm	4 seg. 10 mm	840008
Ø 61 mm	R 1/2"	400 mm	5 seg. 10 mm	840009
Ø 66 mm	R 1/2"	400 mm	5 seg. 10 mm	840010
Ø 71 mm	R 1/2"	400 mm	5 seg. 10 mm	840011
Ø 76 mm	R 1/2"	400 mm	5 seg. 10 mm	840012
Ø 82 mm	R 1/2"	400 mm	6 seg. 10 mm	840013
Ø 87 mm	R 1/2"	400 mm	6 seg. 10 mm	840014
Ø 92 mm	R 1/2"	400 mm	6 seg. 10 mm	840015
Ø 97 mm	R 1/2"	400 mm	6 seg. 10 mm	840016
Ø 102 mm	R 1/2"	400 mm	7 seg. 10 mm	840017
Ø 107 mm	R 1/2"	400 mm	7 seg. 10 mm	840018
Ø 112 mm	R 1/2"	400 mm	7 seg. 10 mm	840019
Ø 117 mm	R 1/2"	400 mm	7 seg. 10 mm	840020
Ø 122 mm	R 1/2"	400 mm	8 seg. 10 mm	840021
Ø 127 mm	R 1/2"	400 mm	8 seg. 10 mm	840022
Ø 132 mm	R 1/2"	400 mm	8 seg. 10 mm	840023
Ø 142 mm	R 1/2"	400 mm	10 seg. 10 mm	840142
Ø 152 mm	R 1/2"	400 mm	10 seg. 10 mm	840152
Ø 162 mm	R 1/2"	400 mm	10 seg. 10 mm	840162
Ø 172 mm	R 1/2"	400 mm	10 seg. 10 mm	840172

Note: Can be ordered without holes for dust extraction.

MARATHON 5/4" | HIGH-END

Dry drilling of various building materials, except for very hard materials like (reinforced) concrete.

ø				art. nr
Ø 30 mm	5/4"	400 mm	4 seg. 10 mm	850002
Ø 36 mm	5/4"	400 mm	4 seg. 10 mm	850004
Ø 41 mm	5/4"	400 mm	4 seg. 10 mm	850005
Ø 46 mm	5/4"	400 mm	4 seg. 10 mm	850006
Ø 51 mm	5/4"	400 mm	4 seg. 10 mm	850007
Ø 56 mm	5/4"	400 mm	4 seg. 10 mm	850008
Ø 61 mm	5/4"	400 mm	5 seg. 10 mm	850009
Ø 66 mm	5/4"	400 mm	5 seg. 10 mm	850010
Ø 71 mm	5/4"	400 mm	5 seg. 10 mm	850011
Ø 76 mm	5/4"	400 mm	5 seg. 10 mm	850012
Ø 82 mm	5/4"	400 mm	6 seg. 10 mm	850013
Ø 87 mm	5/4"	400 mm	6 seg. 10 mm	850014
Ø 92 mm	5/4"	400 mm	6 seg. 10 mm	850015
Ø 97 mm	5/4"	400 mm	6 seg. 10 mm	850016
Ø 102 mm	5/4"	400 mm	7 seg. 10 mm	850017
Ø 107 mm	5/4"	400 mm	7 seg. 10 mm	850018
Ø 112 mm	5/4"	400 mm	7 seg. 10 mm	850019
Ø 117 mm	5/4"	400 mm	7 seg. 10 mm	850020
Ø 122 mm	5/4"	400 mm	8 seg. 10 mm	850021
Ø 127 mm	5/4"	400 mm	8 seg. 10 mm	850022
Ø 132 mm	5/4"	400 mm	8 seg. 10 mm	850023
Ø 142 mm	5/4"	400 mm	10 seg. 10 mm	850142
Ø 152 mm	5/4"	400 mm	10 seg. 10 mm	850152
Ø 162 mm	5/4"	400 mm	10 seg. 10 mm	850162
Ø 172 mm	5/4"	400 mm	10 seg. 10 mm	850172

GRANITO 1/2" — HIGH-END

Especially for drilling in stone and very hard ceramic, granite, porcelain, etc.

Ø				art. nr
Ø 6 mm	R 1/2"	50mm	O	143165
Ø 8 mm	R 1/2"	50mm	O	143166
Ø 10 mm	R 1/2"	70mm	O	143167
Ø 12 mm	R 1/2"	70mm	O	143168
Ø 14 mm	R 1/2"	100mm	O	143169
Ø 15 mm	R 1/2"	100mm	O	143170
Ø 16 mm	R 1/2"	100mm	O	143171
Ø 18 mm	R 1/2"	100mm	O	143172
Ø 20 mm	R 1/2"	100mm	O	143173
Ø 22 mm	R 1/2"	100mm	O	143174
Ø 24 mm	R 1/2"	100mm	O	143175
Ø 25 mm	R 1/2"	100mm	O	143176
Ø 26 mm	R 1/2"	100mm	O	143177
Ø 28 mm	R 1/2"	100mm	O	143178
Ø 30 mm	R 1/2"	100mm	O	143179
Ø 32 mm	R 1/2"	100mm	O	143181
Ø 35 mm	R 1/2"	100mm	O	143182
Ø 36 mm	R 1/2"	100mm	O	143183
Ø 38 mm	R 1/2"	100mm	O	143184
Ø 40 mm	R 1/2"	100mm	O	143185
Ø 42 mm	R 1/2"	100mm	O	143186
Ø 45 mm	R 1/2"	100mm	9 mm	143187
Ø 50 mm	R 1/2"	100mm	9 mm	143188
Ø 55 mm	R 1/2"	150mm	9 mm	143190
Ø 60 mm	R 1/2"	150mm	9 mm	143191
Ø 65 mm	R 1/2"	150mm	9 mm	143192
Ø 70 mm	R 1/2"	150mm	9 mm	143193
Ø 75 mm	R 1/2"	150mm	9 mm	143194
Ø 80 mm	R 1/2"	150mm	9 mm	143195
Ø 85 mm	R 1/2"	150mm	9 mm	143196
Ø 90 mm	R 1/2"	150mm	9 mm	143197
Ø100 mm	R 1/2"	150mm	9 mm	143199
Ø110 mm	R 1/2"	150mm	9 mm	143201
Ø115 mm	R 1/2"	150mm	9 mm	143202
Ø120 mm	R 1/2"	150mm	9 mm	143203
Ø125 mm	R 1/2"	150mm	9 mm	143204
Ø130 mm	R 1/2"	150mm	9 mm	143205
Ø140 mm	R 1/2"	150mm	9 mm	143206
Ø150 mm	R 1/2"	150mm	9 mm	143207

MARATHON 1/2" | HIGH-END

The all-rounder, for which river pebbles are not a problem. This drill bit can also handle abrasievere material.

Ø				art. nr
Ø 8 mm	R 1/2"	200 mm	O	K610008
Ø 10 mm	R 1/2"	200 mm	O	K610010
Ø 12 mm	R 1/2"	300 mm	O	K610012
Ø 14 mm	R 1/2"	300 mm	O	K610014
Ø 15 mm	R 1/2"	300 mm	O	K610015
Ø 16 mm	R 1/2"	300 mm	O	K610016
Ø 18 mm	R 1/2"	300 mm	O	K610018
Ø 20 mm	R 1/2"	300 mm	O	K610020
Ø 22 mm	R 1/2"	300 mm	O	K610022
Ø 25 mm	R 1/2"	400 mm	O	K610025
Ø 25 mm	R 1/2"	400 mm	3 seg.	610025IF
Ø 28 mm	R 1/2"	400 mm	O	K610028
Ø 30 mm	R 1/2"	400 mm	O	K610030
Ø 30 mm	R 1/2"	400 mm	4 seg.	610030IF
Ø 32 mm	R 1/2"	400 mm	O	K610032
Ø 32 mm	R 1/2"	400 mm	4 seg.	610032
Ø 35 mm	R 1/2"	400 mm	O	K610035
Ø 35 mm	R 1/2"	400 mm	4 seg.	610035
Ø 40 mm	R 1/2"	400 mm	O	K610040
Ø 40 mm	R 1/2"	400 mm	4 seg.	610040IF
Ø 46 mm	R 1/2"	400 mm	4 seg. 10 mm	610046
Ø 51 mm	R 1/2"	400 mm	5 seg. 10 mm	610051
Ø 56 mm	R 1/2"	400 mm	5 seg. 10 mm	610056
Ø 61 mm	R 1/2"	400 mm	6 seg. 10 mm	610061IF
Ø 66 mm	R 1/2"	400 mm	6 seg. 10 mm	610066
Ø 71 mm	R 1/2"	400 mm	6 seg. 10 mm	610071
Ø 76 mm	R 1/2"	400 mm	7 seg. 10 mm	610076
Ø 82 mm	R 1/2"	400 mm	8 seg. 10 mm	610082
Ø 87 mm	R 1/2"	400 mm	8 seg. 10 mm	610087
Ø 92 mm	R 1/2"	400 mm	9 seg. 10 mm	610092
Ø 97 mm	R 1/2"	400 mm	9 seg. 10 mm	610097
Ø 102 mm	R 1/2"	400 mm	10 seg. 10 mm	610102
Ø 107 mm	R 1/2"	400 mm	10 seg. 10 mm	610107
Ø 112 mm	R 1/2"	400 mm	10 seg. 10 mm	610112
Ø 117 mm	R 1/2"	400 mm	10 seg. 10 mm	610117
Ø 122 mm	R 1/2"	400 mm	11 seg. 10 mm	610122
Ø 127 mm	R 1/2"	400 mm	11 seg. 10 mm	610127
Ø 132 mm	R 1/2"	400 mm	11 seg. 10 mm	610132
Ø 142 mm	R 1/2"	400 mm	12 seg. 10 mm	610142
Ø 152 mm	R 1/2"	400 mm	13 seg. 10 mm	610152
Ø 162 mm	R 1/2"	400 mm	13 seg. 10 mm	610162
Ø 172 mm	R 1/2"	400 mm	13 seg. 10 mm	610172

MARATHON 5/4" | HIGH-END

The all-rounder, for which river pebbles are not a problem. This drill bit can also handle abrasievere material. Mainly suitable for powerful machines.

Ø				art. nr
Ø 25 mm	5/4" UNC	450 mm	2 seg. 11 mm	611025
Ø 28 mm	5/4" UNC	450 mm	3 seg. 11 mm	611028
Ø 30 mm	5/4" UNC	450 mm	3 seg. 11 mm	611030
Ø 32 mm	5/4" UNC	450 mm	4 seg. 11 mm	611032
Ø 35 mm	5/4" UNC	450 mm	4 seg. 11 mm	611036
Ø 41 mm	5/4" UNC	450 mm	5 seg. 11 mm	611041
Ø 45 mm	5/4" UNC	450 mm	5 seg. 11 mm	611046
Ø 52 mm	5/4" UNC	450 mm	5 seg. 11 mm	611051
Ø 57 mm	5/4" UNC	450 mm	6 seg. 11 mm	611056
Ø 62 mm	5/4" UNC	450 mm	6 seg. 11 mm	611061
Ø 67 mm	5/4" UNC	450 mm	6 seg. 11 mm	611066
Ø 72 mm	5/4" UNC	450 mm	7 seg. 11 mm	611071
Ø 77 mm	5/4" UNC	450 mm	8 seg. 11 mm	611076
Ø 82 mm	5/4" UNC	450 mm	8 seg. 11 mm	611082
Ø 87 mm	5/4" UNC	450 mm	8 seg. 11 mm	611087
Ø 92 mm	5/4" UNC	450 mm	9 seg. 11 mm	611092
Ø 97 mm	5/4" UNC	450 mm	9 seg. 11 mm	611097
Ø102 mm	5/4" UNC	450 mm	9 seg. 11 mm	611102
Ø107 mm	5/4" UNC	450 mm	9 seg. 11 mm	611107
Ø112 mm	5/4" UNC	450 mm	10 seg. 11 mm	611112
Ø117 mm	5/4" UNC	450 mm	10 seg. 11 mm	611117
Ø122 mm	5/4" UNC	450 mm	11 seg. 11 mm	611122
Ø127 mm	5/4" UNC	450 mm	11 seg. 11 mm	611127
Ø132 mm	5/4" UNC	450 mm	11 seg. 11 mm	611132
Ø142 mm	5/4" UNC	450 mm	12 seg. 11 mm	611142
Ø152 mm	5/4" UNC	450 mm	13 seg. 11 mm	611152
Ø161 mm	5/4" UNC	450 mm	14 seg. 11 mm	611162
Ø171 mm	5/4" UNC	450 mm	14 seg. 11 mm	611172
Ø181 mm	5/4" UNC	450 mm	15 seg. 11 mm	611182
Ø200 mm	5/4" UNC	450 mm	15 seg. 11 mm	611200
Ø230 mm	5/4" UNC	450 mm	15 seg. 11 mm	611230
Ø250 mm	5/4" UNC	450 mm	16 seg. 11 mm	611250
Ø280 mm	5/4" UNC	450 mm	17 seg. 11 mm	611280
Ø300 mm	5/4" UNC	450 mm	18 seg. 11 mm	611301
Ø350 mm	5/4" UNC	450 mm	21 seg. 11 mm	611350
Ø400 mm	5/4" UNC	450 mm	25 seg. 11 mm	611400
Ø450 mm	5/4" UNC	450 mm	27 seg. 11 mm	611450
Ø500 mm	5/4" UNC	450 mm	28 seg. 11 mm	611500
Ø550 mm	5/4" UNC	450 mm	29 seg. 11 mm	611550
Ø600 mm	5/4" UNC	450 mm	30 seg. 11 mm	611600

SPRINT 1/2" | HIGH-END

The quick drill for all materials and can handle rebar. Ideal for drilling by hand and up to twice the speed.

Ø				art. nr
Ø 20 mm	R 1/2"	300 mm	O	K620020
Ø 22 mm	R 1/2"	300 mm	O	K620022
Ø 25 mm	R 1/2"	400 mm	O	K620025
Ø 28 mm	R 1/2"	400 mm	O	K620028
Ø 30 mm	R 1/2"	400 mm	O	K620030
Ø 32 mm	R 1/2"	400 mm	O	K620032
Ø 35 mm	R 1/2"	400 mm	O	K620036
Ø 40 mm	R 1/2"	400 mm	O	K620041
Ø 45 mm	R 1/2"	400 mm	4 seg. 9 mm	620046
Ø 51 mm	R 1/2"	400 mm	5 seg. 9 mm	620051
Ø 56 mm	R 1/2"	400 mm	6 seg. 9 mm	620056
Ø 61 mm	R 1/2"	400 mm	6 seg. 9 mm	620061
Ø 66 mm	R 1/2"	400 mm	7 seg. 9 mm	620066
Ø 68 mm	R 1/2"	400 mm	7 seg. 9 mm	620068
Ø 71 mm	R 1/2"	400 mm	7 seg. 9 mm	620071
Ø 76 mm	R 1/2"	400 mm	8 seg. 9 mm	620076
Ø 81 mm	R 1/2"	400 mm	8 seg. 9 mm	620082
Ø 86 mm	R 1/2"	400 mm	8 seg. 9 mm	620087
Ø 91 mm	R 1/2"	400 mm	9 seg. 9 mm	620092
Ø 96 mm	R 1/2"	400 mm	9 seg. 9 mm	620097
Ø101 mm	R 1/2"	400 mm	9 seg. 9 mm	620102
Ø105 mm	R 1/2"	400 mm	9 seg. 9 mm	620107
Ø111 mm	R 1/2"	400 mm	10 seg. 9 mm	620112
Ø115 mm	R 1/2"	400 mm	10 seg. 9 mm	620117
Ø121 mm	R 1/2"	400 mm	11 seg. 9 mm	620122
Ø125 mm	R 1/2"	400 mm	11 seg. 9 mm	620127
Ø130 mm	R 1/2"	400 mm	11 seg. 9 mm	620132
Ø140 mm	R 1/2"	400 mm	12 seg. 9 mm	620142
Ø150 mm	R 1/2"	400 mm	13 seg. 9 mm	620152
Ø160 mm	R 1/2"	400 mm	13 seg. 9 mm	620162
Ø170 mm	R 1/2"	400 mm	14 seg. 9 mm	620172
Ø180 mm	R 1/2"	400 mm	15 seg. 9 mm	620182
Ø200 mm	R 1/2"	400 mm	16 seg. 9 mm	620202IF

SPRINT 5/4" | HIGH-END

Quick drill for all materials including rebar. Also suitable for powerful motors.

Ø				art. nr
Ø 25 mm	5/4" UNC	450 mm	3 seg. 11 mm	621025
Ø 28 mm	5/4" UNC	450 mm	3 seg. 11 mm	621028
Ø 30 mm	5/4" UNC	450 mm	3 seg. 11 mm	621030
Ø 32 mm	5/4" UNC	450 mm	4 seg. 11 mm	621032
Ø 35 mm	5/4" UNC	450 mm	4 seg. 11 mm	621036
Ø 41 mm	5/4" UNC	450 mm	5 seg. 11 mm	621041
Ø 45 mm	5/4" UNC	450 mm	5 seg. 11 mm	621046
Ø 52 mm	5/4" UNC	450 mm	5 seg. 11 mm	621051
Ø 57 mm	5/4" UNC	450 mm	6 seg. 11 mm	621056
Ø 62 mm	5/4" UNC	450 mm	6 seg. 11 mm	621060
Ø 67 mm	5/4" UNC	450 mm	6 seg. 11 mm	621066
Ø 72 mm	5/4" UNC	450 mm	7 seg. 11 mm	621071
Ø 77 mm	5/4" UNC	450 mm	8 seg. 11 mm	621076
Ø 82 mm	5/4" UNC	450 mm	8 seg. 11 mm	621082
Ø 87 mm	5/4" UNC	450 mm	8 seg. 11 mm	621087
Ø 92 mm	5/4" UNC	450 mm	9 seg. 11 mm	621092
Ø 97 mm	5/4" UNC	450 mm	9 seg. 11 mm	621097
Ø102 mm	5/4" UNC	450 mm	9 seg. 11 mm	621102
Ø107 mm	5/4" UNC	450 mm	9 seg. 11 mm	621107
Ø112 mm	5/4" UNC	450 mm	10 seg. 11 mm	621112
Ø117 mm	5/4" UNC	450 mm	10 seg. 11 mm	621117
Ø122 mm	5/4" UNC	450 mm	11 seg. 11 mm	621122
Ø127 mm	5/4" UNC	450 mm	11 seg. 11 mm	621127
Ø132 mm	5/4" UNC	450 mm	11 seg. 11 mm	621132
Ø142 mm	5/4" UNC	450 mm	12 seg. 11 mm	621142
Ø152 mm	5/4" UNC	450 mm	13 seg. 11 mm	621152
Ø161 mm	5/4" UNC	450 mm	14 seg. 11 mm	621162
Ø171 mm	5/4" UNC	450 mm	14 seg. 11 mm	621172
Ø181 mm	5/4" UNC	450 mm	15 seg. 11 mm	621182
Ø191 mm	5/4" UNC	450 mm	15 seg. 11 mm	621192
Ø200 mm	5/4" UNC	450 mm	15 seg. 11 mm	621200
Ø210 mm	5/4" UNC	450 mm	15 seg. 11 mm	621210
Ø225 mm	5/4" UNC	450 mm	15 seg. 11 mm	621225
Ø230 mm	5/4" UNC	450 mm	15 seg. 11 mm	621230
Ø250 mm	5/4" UNC	450 mm	16 seg. 11 mm	621250
Ø260 mm	5/4" UNC	450 mm	16 seg. 11 mm	621260
Ø275 mm	5/4" UNC	450 mm	16 seg. 11 mm	621275
Ø280 mm	5/4" UNC	450 mm	17 seg. 11 mm	621280
Ø300 mm	5/4" UNC	450 mm	18 seg. 11 mm	621301
Ø320 mm	5/4" UNC	450 mm	19 seg. 11 mm	621320
Ø350 mm	5/4" UNC	450 mm	21 seg. 11 mm	621350
Ø400 mm	5/4" UNC	450 mm	25 seg. 11 mm	621400
Ø450 mm	5/4" UNC	450 mm	27 seg. 11 mm	621450
Ø500 mm	5/4" UNC	450 mm	28 seg. 11 mm	621500
Ø550 mm	5/4" UNC	450 mm	29 seg. 11 mm	621550
Ø600 mm	5/4" UNC	450 mm	30 seg. 11 mm	621600

Dry drilling in reinforced concrete

This easy-to-use system with integrated vacuum cleaner provides an easy, clean and cost-efficient solution for drilling reinforced concrete. The Oscillator dry drilling system, compared to existing dry drilling systems, is extremely wear-resistant.

UNIQUE SYSTEM

+ Easy to operate
+ Clean and dry drilling with produced extration
+ Speed up to wet drilling performance
+ *Cost efficient*
+ *Perfect results in reinforced concrete*

InterDiamant dry drilling with the Oscillator technolgy

+ Very stable when drilling in reinforced steel concrete
+ Wide range of different diameters
+ Optimised lengths for drilling from hand
+ Oscillator dry drilling do not deform and ensure a reliable result.

Oscillator
Dry drilling equipment
InterDiamant

Drillmotor ID2200

+ Switchable vibration function and 1/2 "and 5/4 "Connection
+ Soft start-up and LED display for controlled drilling
+ Center pin for precise feed
+ Possibility of wet drilling (with waterkit)

ID2200	
	ID2200
Drillmotor	ID2200
Voltage	230 V / 50 Hz
Drill diameter range	52-200 mm
Max. drill diameter in reinforced concrete	132 mm
Power	2 kW
Speed	1150 rpm
Oscillating frequency	28000/min
Drill connection	1/2" & 5/4"
Usage	by hand / on stand
Application	Dry Drilling
Electronic overload stop	ja
Mechanical overlay stop	ja
Ø connection stand	60 mm
Art. nr.	ID2200
Dimensions & Weight	
Length	510 mm
Depth	95 mm
Height	170 mm
Weight	5.2 kg

SYSTEM & ACCESSOIRIES	
Drill motor ID2200	ID2200
Drill stand D200	900070

ACCESSORIES	
Center pin 300-450	B74179
Center inlay Ø 51 mm	B63834
Center inlay Ø 61 mm	B63842
Center inlay Ø 71 mm	B63859
Center inlay Ø 81 mm	B63867
Center inlay Ø 91 mm	B63875
Center inlay Ø 101 mm	B63883
Center inlay Ø 111 mm	B63891
Center inlay Ø 121 mm	B63909
Center inlay Ø 131 mm	B63917
Center inlay Ø 141 mm	B7091
Center inlay Ø 151 mm	B63925
Center inlay Ø 161 mm	B63933
Adaptor 1/2" > M16	609019
Center drill	609003
Center pin box drilling 5/4"	B6471
Waterkit	B69468
Oscillator Protective cap	1130012

Oscillator dry drills are specially developed for the InterDiamant dry drilling system

HIGH-END DRY DRILLING OSCILLATOR TECHNOLOGY

With an extensive programme of oscillator drills, in various diameters, InterDiamant has a suitable solution for every application.

Just as quick and economical as a wet drill, and ergonomically perfect with use of the matching (ceiling) drill stand.

Oscillator
Dry drilling equipment
InterDiamant

⌀	xY	art. nr.
Ø 51x300x5/4"	11 mm x 4	5130054
Ø 61x300x5/4"	11 mm x 4	6130054
Ø 71x300x5/4"	11 mm x 4	7130054
Ø76x300x5/4"	11 mm x 4	7630054
Ø 81x300x5/4"	11 mm x 4	8130054
Ø 91x300x5/4"	11 mm x 5	9130054
Ø 101x300x5/4"	11 mm x 5	10130054
Ø 111x300x5/4"	11 mm x 5	11130054
Ø 121x300x5/4"	11 mm x 5	12130054
Ø 131x300x5/4"	11 mm x 6	13130054
Ø 141x300x5/4"	11 mm x 6	14130054
Ø 151x300x5/4"	11 mm x 7	15130054
Ø 161x300x5/4"	11 mm x 8	16130054

DIAMOND DRILL BITS FOR TILES

310022

301004

Especially for drilling in stone and very hard ceramic, granite, porcelain, etc.

Ø		art. nr
Ø 5 mm	40 mm	310005
Ø 6 mm	70 mm	310006
Ø 8 mm	70 mm	310008
Ø 10 mm	70 mm	310010
Ø 12 mm	70 mm	310012
Accessories		art. nr.
Body for M10		310013
Chuck for water 13 mm - 1/2"		301013
Case with 6, 8, 10 and 12 mm + body + water cup + M12 key + drill guide		310022
Drill guide in stainless steel		301004

DIAMOND CORE DRILLS

HIGH-END

Drilling holes in wall tiles, marble, ceramic, granite, etc.
(to be used on a regular small angle grinder M14).

301005

Ø		art. nr
Ø 20 mm	M14	810020
Ø 27 mm	M14	810027
Ø 35 mm	M14	810035
Ø 40 mm	M14	810040
Ø 50 mm	M14	810050
Ø 60 mm	M14	810060
Ø 75 mm	M14	810075
set Ø 27-35-50-60-75 mm	M14	810100IF
Accessories		art. nr.
Drill guide		301005

TILE BOX DIAMOND DRILL

Drilling in stone. Can be connected directly to a 13 mm power tool drill.
Speed: 1.000-2.500 rpm

Ø	art. nr
Ø 6 mm	710006
Ø 8 mm	710008
Ø 10 mm	710010
Ø 12 mm	710012
Ø 16 mm	710016
Ø 18 mm	710018
Ø 22 mm	710022
Ø 27 mm	710027
Ø 32 mm	710032
Ø 35 mm	710035
Ø 40 mm	710040
Ø 50 mm	710050
Ø 60 mm	710060
Ø 68 mm	710068
Ø 75 mm	710075
Ø 83 mm	710083
Ø 102 mm	710102
Ø 112 mm	710112
Ø 122 mm	710122
set 2 x Ø 6-8-10-12 mm	710200
set Ø 6-8-10-12-16-27-35-50-68-75 mm	710004
set Ø 6-8-10-12-16-22-35-50-68-75 mm + Drill guide in ABS + pressure vessel	710300
Drill guide in ABS + pressure vessel	710001
Drill guide in ABS	710002

710200

710004

710300

TILE DIAMOND DRILL SET

Drilling in stone and hard tiles.
With internal coolant. Longevity. Chuck 13 mm.

ø		art. nr
Ø 5 mm	35 mm	510005IF
Ø 6 mm	35 mm	510006
Ø 8 mm	35 mm	510008
Ø 10 mm	35 mm	510010
Ø 12 mm	35 mm	510012
Ø 14 mm	35 mm	510014
Set : 2 x Ø 6-8 + 1 x 10	35 mm	510200
Set : 2 x Ø 6-8 + 1 x 10 + inox guide	35 mm	510300

510200

510300

EXTRA LENGTH

Extra length per 100 mm	art. nr
Ø 0 > Ø 52 mm	100108
Ø 53 > Ø 90 mm	100109
Ø 91 > Ø 110 mm	100110
Ø 111 > Ø 180 mm	100111
Ø 181 > Ø 250 mm	100112
Ø 251 > Ø 300 mm	100113
Ø 301 > Ø 350 mm	100114
Ø 351 > Ø 600 mm	100116

EXAMPLE



DIFFERENT CONNECTION

Alternative connections	art. nr
M18-M14-M16	100117

EXAMPLE



HOLE CUTTER

Diameter	Lu	Lt	art. nr
14	36	54	650D14
40	38	43,5	650D40
51	38	43,5	650D51
64	38	43,5	650D64
76	38	43,5	650D76
79	38	43,5	650D79
92	38	43,5	650D92
98	38	43,5	650D98
111	38	43,5	650D111
127	38	43,5	650D127
133	38	43,5	650D133
168	38	43,5	650D168
200	38	43,5	650D200
210	38	43,5	650D210
connector 9,5mm(14 - 30mm)			651HEX01
connector 9,5mm(32 - 210mm)			651HEX03
connector SDS plus (14 - 30mm)			651SDS01
connector SDS plus (32 - 210mm)			651SDS02
center drill L 83mm			651L083
center drill L 102mm			651L102

DRILL STAND OVERVIEW

SERIE	D200	D250	D350	C520
Max. drill diameter (mm)	200	250	350	500
Max. free drill passage (mm)	560	605	705	650
Weight (kg)	8,8	11,4	21,3	22,5
Adjustable angle	0 - 60°	0 - 45°	0 - 60°	0 - 75°
Column	alu	alu	alu	steel
Guiding plate with four guide wheels	+	+	-	-
Number of roller guides			4	12
Brake on plate	+	+	+	+
Vacuum base plate		+	+	
Motorchair mounting	+	Accessory	Accessory	-
Motorplate fastening	Accessory	+	+	+
Control spacer left/right	+	+	+	+
Dimensions (mm)	200 x 280 x 835	225 x 380 x 940	270 x 400 x 1042	230 x 330 x 1120
art. nr.	D200	D250	D350	D520

D200

SERIE	D200
Max. drill diameter (mm)	200
Max. free drill passage (mm)	560
Weight (kg)	8,8
Adjustable angle	0 - 60°
Pillar material	alu
Guiding plate with four guide wheels	+
Number of roller guides	
Brake on plate	+
Vacuum base plate	
Motorchair mounting	+
Motorplate fastening	Accessory
Control spacer left/right *te*	+
Dimensions (mm)	200 x 280 x 835
art. nr.	D200

Aluminium lightweight drill stand for drill boreholes up to 200mm, ideal for the Oscillator dry drilling system.

DRILL STAND

D250

SERIE	D250
Max. drill diameter (mm)	250
Max. free drill passage (mm)	605
Weight (kg)	11,4
Adjustable angle	0 - 45°
Pillar material	alu
Guiding plate with four guide wheels	+
Number of roller guides	
Brake on plate	+
Vacuum base plate	+
Motorchair mounting	Accessory
Motorplate fastening	+
Control spacer left/right	+
Dimensions (mm)	225 x 380 x 940
art. nr.	D250

Aluminium drill stand for drilling up to 250mm with integrated vacuum plate.

ACCESSORIES FOR D250

	description	art. nr.
	Vacuum set	900073

DRILL STAND

D350

SERIE	D350
Max. drill diameter (mm)	350
Max. free drill passage (mm)	705
Weight (kg)	21,3
Adjustable angle	0 - 60°
Pillar material	alu
Guiding plate with four guide wheels	-
Number of roller guides	4
Brake on plate	+
Vacuum base plate	+
Motorchair mounting	Accessory
Motorplate fastening	+
Control spacer left/right	+
Dimensions (mm)	270 x 400 x 1042
art. nr.	D350

Aluminium drill stand for drilling up to 350mm with roller guides and integrated vacuum plate.

ACCESSORIES FOR D350

	description	art. nr.
	Distance block 5 cm for placing all motors on InterDiamant stands.	D350-40

C520

SERIE	C520
Max. drill diameter (mm)	500
Max. free drill passage (mm)	650
Weight (kg)	22,5
Adjustable angle	0 - 75°
Pillar material	steel
Guiding plate with four guide wheels	-
Number of roller guides	12
Brake on plate	+
Vacuum base plate	
Motorchair mounting	-
Motorplate fastening	+
Control spacer left/right	+
Dimensions (mm)	230 x 330 x 1120
art. nr.	C520

Steel drill stand for drilling holes up to 500mm with integrated roller bearings.

description	art. nr	
Water collecting ring 250mm	503999	Water cap ring
Replacement rubber 250mm	501712	
Universal rubber 300mm	505104	
Water cap ring 300mm	504891	
Vacuum kit	504577	
Replacement rubber for 504577	504583	
Extension piece for stand C520	504867	
20 mm (ca. 0,78") - 4 holes	502545	*Aluminium spacer block*
20 mm (ca. 0,78") - 6 holes	501899	
50 mm (ca. 2") - 4 holes	502296	
45 mm (ca. 1,7") - 6 holes	501852	
60 mm (ca. 2,3") - 6 holes	501654	
110 mm (ca. 4,3") - 6 holes	501634	
200mm	501911	*Steel spacer block*
300mm	501585	

CDR150

	CDR150
Max. drill diameter (mm)	150
Max. free drill passage (mm)	600
Weight (kg)	32
Self-lubricating guides	+
Brake on the trolley	+
Mounting for hand drill motor	ø 60
Mounting for motor plate	+
Control spacer left/right	+
Max. ceiling height (mm)	3330
art. nr.	CDR150

Ceiling drill stand for drill holes up to 150mm with four-sided guide and unique quick-release clamping system for quick mounting.

ACCESSORIES FOR

CDR150

description	art. nr	
Water collecting ring 150 mm	WCR-CDR150	
Rubber for water collecting ring	501111	

PRO-DRILL CERAMICS

Drilling machine with 1/2 "water extraction connection and drill, in case. Developped for wet drilling of natural stone, tiles, ceramic, granite, etc.

	BDB 802 B	BDB802
Power (Watt)	800	800
Adapter	1/2"	1/2"
Speed (rpm)	0-4000 0-7500	0-4000 0-7500
Max. drilling capacity in stone	Ø5-50	Ø5-50
art. nr.	67322	58719

BDB802

ID 3150 - ID 2200

	ID 3150	ID 2200
Power (Watt)	2000	2000
Voltage	220	220
Speed (rpm)	1650	1150
Maximum drilling capacity in brick (mm)	150	200
Vibration frequency	33.000	28.000
Tool fixture	M18	5/4" - 1/2"
Weight (kg)	5.2	5.2
Torque (NM)	19	24
Delivered in case	+	+
Slipping clutch	+	+
art. nr.	ID3150	ID2200

ID 3150

ID 2200

DK16 - DK17 - ID3200-P

	DK 1603	DK 17	ID3200-P
Power (Watt)	2000	2000	2200
Voltage	240	240	240V
Speed gear 1	540	540	530
Speed gear 2	1200	1200	1280
Speed gear 3	2520	2520	1780
Max. drilling capacity in stone (mm)	200	200	200
Max. drill capacity in concrete (mm)	160	160	160
Clutch	+	+	+
Integrated cooling water	+	+	+
Tool fixture	5/4" - 1/2"	5/4" - 1/2"	5/4" - 1/2"
Weight (kg)	5.9	6.2	
RCD switch	+	+	+
Delivered in case	+	+	+
Application: drilling by hand with side handle	+	+	+
Application: drilling with drill stand (diam. 56mm)	60mm	60mm	60mm
art. nr.	DK1603	DK17	ID3200-P

DK1603

DK17

ID3200-P

TALPA 1800		
		TALPA 1800
Power (Watt)		1800
Voltage		240
Speed (rpm)		1300
Max. drilling capacity in stone (mm)		100
Max. drill capacity in concrete (mm)		-
Clutch		+
Integrated cooling water		-
Tool fixture		M18
Weight (kg)		4.3
RCD switch		-
Delivered in case		+
art. nr		900194

TALPA 1800

ID3200		
		ID3200
Power (Watt)		1800
Voltage		240
Speed gear 1		530
Speed gear 2		1280
Speed gear 3		1780
Max. drilling capacity in stone (mm)		200
Max. drill capacity in concrete (mm)		160
Clutch		+
Integrated cooling water		+
Tool fixture		1/2" + 5/4"
Weight (kg)		7.5
RCD switch		+
Delivered in case		+
Application: drilling by hand with side handle		+
Application: drilling on drill stand		+
art. nr		ID3200

ID3200

TALPA T2-E / T6-E / T9-E / DK32				
	T2	T6-375	T9-475	DK32
Power (Watt)	2570	3420	3420	3200
Voltage	240	230	230	230
Speed gear 1	330	230	210	230
Speed gear 2	570	520	360	480
Speed gear 3	790	965	600	720
Speed gear 4	-	-	1000	-
Max. drilling capacity in concrete (mm)	220	375	475	350
Clutch	+	+	+	+
Integrated cooling water	+	+	+	+
Tool fixture	5/4"	5/4"	5/4"	5/4"
Weight (kg)	9.8	12.5	14.5	11.9
RCD switch	+	+	+	+
Application: drilling with drill stand	+	+	+	+
art. nr	900193	900201	900190	DK32

T2

T6-375

T9-475

DK32

Motors delivered without motor plate

ROTATION SPEED DIAMOND DRILLS

Drill dia. (mm)	Hard materials (rpm)	Soft materials (rpm)
20	2.626	4.520
25	2.101	3.616
28	1.876	3.229
30	1.751	3.013
32	1.641	2.825
35	1.501	2.583
41	1.281	2.205
45	1.167	2.009
51	1.030	1.773
57	921	1.586
62	847	1.458
67	784	1.349
72	729	1.256
76	691	1.190
82	641	1.102
87	604	1.039
92	571	983
97	541	932
102	515	886
107	491	845
112	469	807
117	449	773
122	431	741
127	414	712
132	398	685
142	370	637
152	346	595
161	326	562
171	307	529
181	290	499
191	275	473
201	261	450
210	250	430
225	233	402
230	228	393
250	210	362
260	202	348
275	191	329
280	188	323
300	175	301
320	164	283
350	150	258
400	131	226
450	117	201
500	105	181
550	95	164
600	88	151
700	75	129
800	66	113
900	58	100
1.000	53	90

TILE CUTTER

		KG	art. nr.
630	42 x 42	8.8	120021
700	52 x 52	9.7	120022
870	62 x 62	12.0	120026

	art. nr.
Titanium spare wheel	120023

TVP 180

	HP	RPM		45°	45°		B L		KG		art. nr.
230V 50 HZ	850 W	2800	unlimited	unlimited	21 mm	36 mm	unlimited	180 x 25.4	14.5	475x 450 250	120011

Recommended diamond blade

TYPE	Material			art. nr.
TVP 180	tiles	180 x 25.4	tile cutter	339181

ID230/600
ID230/1000

STAINLESS STEEL

Delivered without disc

	HP	RPM		45°	45°				KG	art. nr.
230V - 50Hz	1.5 Kw 2HP	2800	600 mm	600 mm	40 mm	50 mm	500 x 650	230 x 25.4	38	ID230/600
230V - 50Hz	1.5 Kw 2HP	2800	900 mm	900 mm	40 mm	50 mm	500 x 1000	230 x 25.4	46	ID230/1000

Recommended diamond disk

TYPE	Material			art. nr.
ID230	tiles	230 x 25.4	tile cutter	339231
ID230	tiles	230 x 25.4	porcellanato	143161

ID351-120

Delivered without disc

	HP	RPM		45°	45°				KG		art. nr.
230V - 50Hz	2.2 Kw 3HP	2800	1200 mm	1200 mm	70 mm	110 mm	1200 x 510	350 x 25.4	79	1145x 695x 500	ID351-120

Recommended diamond blade

TYPE	Material			art. nr.
ID351-120	tiles	350 x 25.4	porcellanato	143163

STONE AND TILE SAW

ID351

Delivered without disc

	HP	RPM		45°	45°				KG		art. nr.
230V - 50Hz	2.2 Kw 3HP	2800	600 mm	600 mm	70 mm	110 mm	500 x 510	350 x 25.4	77	1145x 695x 500	ID351

Recommended diamond blade

TYPE	Material			art. nr.
ID351	universal	350 x 25.4	uni blits	310350
ID351	concrete	350 x 25.4	beton blits	326350
ID351	tiles	350 x 25.4	porcellanato	143163

ID446

ID446: Rapid construction saws 14 cm in 1 single cutting on 230 V. Can only be used with rapid constrcution saws!

Delivered without disc
* max. saw length at 150 mm saw height

	HP	RPM		45°	45°				KG		art. nr.
230V - 50hz	2,2kW - 3HP	2800	550mm	-	-	150	600 x 500	450 x 25,4	70kg	600x 1200x 1400	ID446

Recommended diamond blade

TYPE	Material			art. nr.
ID440	universal	550 x 25.4	US-530	310450

ID701

ID450: Rapid construction saws 14 cm in 1 single cutting
on 230 V. Can only be used with rapid constrcution saws!

Delivered without disc
ID700 on 230 V mono on demand

	HP	RPM		45°	45°				KG		art. nr.
400V 50Hz	4 Kw	1400	520 mm	/	/	260 mm	550 x 550	700 x 25.4	145	1400 x 740 x 1580	ID701

Recommended diamond blade

TYPE	Material			art. nr.
ID700	universal - concrete	700x30	US-530	310700

ANGLE GRINDER

	ID125-13
Voltage	220V
Power consumption	1300 W
Diameter dicsc (mm)	125
Shaft hole (mm)	22,2 / M14
Adjustable speed (tpm)	+
Max. cutting depth (mm)	33
Weight (kg)	1,9
Speed (t/min)	2800 - 11000
art. nr.	ID125-13

ID125-13

ANGLE GRINDER

	ID230-26
Voltage	220V
Power consumption	2600 W
Diameter dicsc (mm)	230
Shaft hole (mm)	22,2 / M14
Adjustable speed (tpm)	-
Max. cutting depth (mm)	68
Weight (kg)	4,8
Speed (t/min)	6500
art. nr.	ID230-26

ID230-26

CUTTER

	TP400
Voltage	220V
Power	3000 W
Ø disk (mm)	400
Connection diameter (mm)	25.4
2-stroke engine	-
Max. cutting depth (mm)	160
RCD switch	+
Weight (kg)	1
Speed RPM	2500
art. nr.	900205

TP400

FLOOR SAW

	ID500
Power	13 hp
Fuel: Petrol	98
Weight (kg)	120
Connection diameter (mm)	25.4
Max. cutting diameter (mm)	500
Max. cutting depth (mm)	180
Water tank (l)	30 l
Dimensions (mm)	980 x 650 x 1110
art. nr.	ID500

ID 500

VACUUM CLEANERS FOR WATER AND DUST

	BSS 506
Power (Watt)	1400 W
Automatic cleaning of the filter	+
Tank capacity	35 L
Length cable	8 m
Length extraction tube	5 m
Weight (kg)	12.7
art. nr	53587

description	art. nr
Accessoiries set: nose, extension tubes universal nozzle, narrow nozzle	73676
Filter	73692

BSS 506

TRENCH SAWS

	BDN 125	BDN 466/6	PH125S
Power (Watt)	1700	2400	1850
Voltage (V)	230	230	230
Diameter of the blade (mm)	125	150	125
Connection diameter (mm)	22.2	22.2	22.2
Speed (rpm)	7600	8200	5000
Max. cutting width (mm)	30	35	9-43
Max. cutting depth (mm)	30	45	39
Weight (kg)	3.6	5.8	4.6
Including case	+	+	+
Sawing / Cutting	⌀	⌀	⌀
art. nr	8799	6952	900203

* incl. schijven / disques

BDN 125

BDN 466/6

PH125S

	BDN 464/4	MF501
Power (Watt)	2400	1400
Voltage (V)	220	220
Diameter of the blade (mm)	185	-
Connection diameter (mm)	22.2	-
Speed (rpm)	4100	1300
Max. cutting width (mm)	9-43	30
Max. cutting depth (mm)	15-60	45
Weight (kg)	6.5	7
Including metal carrying case	+	+
Sawing	⌀	-
art. nr	6446	250001IF

* incl. discs

BDN 464/4

MF501

MF501	art. nr
Cutters for soft materials	
Cutter No. 67 Width = 30 mm Adjustable depth = 23 to 35 mm	250067
Cutter No. 3 Width = 22 mm Adjustable depth = 23 to 25 mm	250004IF
Milling for silicate	
Cutter n ° 67 width = 30 mm Adjustable depth = 23 to 25 mm	250008

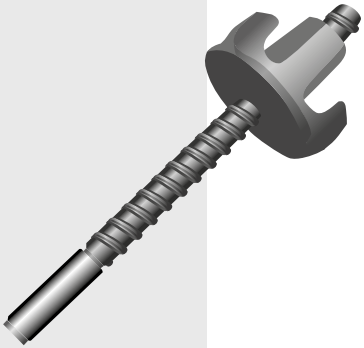

ACCESSORIES FOR DIAMOND CORE DRILLING

	description	art. nr
	Chuck adapter 13 mm to 16 mm (bayonet system)	690001
	Core adapter SDS Plus to 16 mm (bayonet system)	609002
	Center drill (bayonet system)	609003IF
	Adapter Axis motor 1/2 to M16	609019
	Adapter Axis motor M18 to M16	609020
	Extraction adapter M16 (for electricity box drill)	609100
	Quick SDS-Plus® adapter SDS-Plus® 13 mm to connect M16	609011
	Quick SDS-Plus® adapter SDS-Plus® to connect M16	609012
	Quick SDS-Plus® 5/8" adapter to connect M16	609014
	Quick SDS-Plus® 1/2" adapter to connect M18	609015
	Centering drill SDS 8 x 160 Quick SDS adapter	12308L0160

ACCESSORIES FOR DIAMOND DRILLS 1/2" DRY

	description	art. nr
	Adapter 1/2" to motor shaft 5/8	609004
	Adapter 1/2" to motor shaft M18	609021
	Adapter 1/2" to SDS chuck	901003
	Adapter 1/2" to 13 mm chuck	901002
	Adapter Axis motor M18 to M16	609020
	Adapter Axis motor 1/2" to M16	609019
	System for centering dry drilling 86 to 132 mm	100051

	description	art. nr
	Adapter for 1/2" motor shaft to 5/4" drill (male-male)	609005
	Adapter for 1/2" motor shaft to 5/4" drill (female-female)	609017
	Adapter for SDS DI motor shaft to 1/2" drill	901021
	Adapter for Hilti motor shaft DD160, DD250 to 5/4" drill	901006
	Extension 1/2" motor shaft 200 mm	609007
	Extension 1/2" motor shaft 300 mm	609008
	Extension 5/4" motor shaft 200 mm	609022
	Extension 5/4" motor shaft 300 mm	609009
	Extension 5/4" motor shaft 400 mm	609010
	Extension 5/4" motor shaft 500mm length	609018

	description	art. nr
	Ejector bar 5/4"	900069
	Adaption ring for 5/4" bore	619012
	Adaption ring XL for 5/4" bore	619011
	Extraction nozzle DU 38	DU 38
	Extraction nozzle DU 80	DU 80
	Extraction nozzle DU 165	DU 165
	Extraction nozzle DU 220	DU 220
	Replacement membrane DU 80	DUP 80
	Replacement membrane DU 165	DUP 165
	Replacement membrane DU 220	DUP 220
	Drill point locator PK2	PK2

ACCESSORIES MOTOR / DRILL STAND

	description	art. nr
	Quick clamp pin M12	900060
	Quick clamp M12 for hollow materials	910060
	Anchors M12 (100 stuks)	160099
	Pinion M12	ESM12
	Anchor bolt sleeve for hollow materials (100 stuks)	44150
	Quick release bracket (tot maximum 300 cm)	900062
	Feeder head for cooling water 5/8 "shaft to 1/2" bore	901004
	Feeder head for cooling water 13 mm "shaft to 1/2" bore	301013
	Waterpump with quick release S3	200150
	Mounting bracket D200-D250-D350	D200-34
	Waterpump S3	200006
	Pressure vessel of 10 liters, metal	900053
	Pressure vessel of 10 liters, synthetic	900055

	description	art. nr
	Vacuum pump with barrel including connection	200004
	Vacuum pump with barrel including connection	200005
	RCD switch connector (10 mA)	900066
	Adaptor for diamond drill motors tripod D250	D250-36
	Distance block 5cm for mounting all motors on InterDiamond drill stand	D350-40
	Cardi dust extraction adapter from M18 motor to M16 drill bit.	503140
	Cardi dust extraction adapter 1/2 "motor to 1/2" drill bit.	502331
	Cardi dust extraction adapter 5/4" motor to 5/4" drill bit.	502335
	Cardi dust extraction adaptor M18 motor to 1/2" dry drill bit.	503315

MATERIAL TABLE FOR DIAMOND SAW BLADES

Sawblades	Fresh concrete	Asphalt	Reinforced concrete	Hollow concrete blocs	Concrete blocs	Hollow brics	Masonry
Laser beton		•	•••	•••	•••	•	•
Laser allround		•	••	•••	•••	•	•
Silicaat		••				•••	•••
Ligne 2000		•	•	•••	•••	••	••
Laser uni		•	•	••	••	•	•
Uni blitz			••	••	••		
Laser marathon			•••	•••	•••		
ECO			••	••	••		
Turbo cool		•	••	•••	••	•	•
Turbo premium			••	••	••	•	••
Turbo flange			••	•	•	•	•
W2B	••	•••				•••	••
Vacuum brazed							
Duo complete							
M3S		•				••	•
Blauwe steen		•					
Super graniet			•	••	••		
Tilecutter							
Speedcutter							
Porcellanato gres							
US-530				•		•••	••
Beton standard		•	•••	•••	•••	•	•
Beton super			•••	•••	•••		•
HS-530	•••	••				•	
W5TS	••	•••				•	
ASX8	•	•••				•	
Beton (floor saw)			•••				
Beton (wall saw)			•••				
Bleu						••	
Rouge			••		••		
Premium							••
Duster			•••	••	•••		•
Prelium dubbel	•	•	•••	••	•••		••
Rapcol							
Multi cutter							
ID10							
ID20							
ID33 IDK33							
ID80 IDK80							
ID67							
ID F1							
ID F2							
Vision							
ID 85							
ID86							

Sawblades	Facade renova-tion	Aerated concrete blocs	Concrete roof tile	Clay rooftile	Glazed rooftile	Slate rooftile
Laser beton	•	•	•••	•		
Laser allround	•	•	••	••		•
Silicaat	••	••	•	••		
Ligne 2000	•	•	••	••		
Laser uni		•	••	••		
Uni blitz		•	•			
Laser marathon			••			
ECO			•			
Turbo cool		•	•••	•••	•••	••
Turbo premium		•	••	••	••	•
Turbo flange	•	•				
W2B	••	••		•		
Vacuum brazed						
Duo complete						
M3S		•				•
Blauwe steen		•••••		•		•
Super graniet			•			
Tile cutter			••	••	••	••
Speed cutter			••	••	••	••
Porcellanato gres						
US-530		••	•	••		
Beton standard	•	•	•••	•		
Beton super						
HS-530		••				
W5TS						
ASX8						
Beton (floor saw)						
Beton (wall saw)						
Bleu	•••	••				
Rouge	•••					
Premium	•••					
Duster	•					
Prelium dubbel	••					
Rapcol						
Multi cutter						
ID10						
ID20						
ID33 IDK33						
ID80 IDK80						
ID67						
ID F1						
ID F2						
Vision						
ID 85						
ID86						

MATERIAL TABLE FOR DIAMOND SAW BLADES

Sawblades	Hard clay stone	Blue stone	Granite	Marble	Glue removal	Ceramic tiles
Laser beton	••	••	••	••		
Laser allround	••	•	••	•		
Silicaat		•		•		
Ligne 2000	•	•				
Laser uni	•					
Uni blitz						
Laser marathon			•			
ECO		•	•			
Turbo cool	•	•	•	•		
Turbo premium	•	•	•	•		
Turbo flange						
W2B				•		
Vacuum brazed						
Duo complete						
M3S		•		•••		
Blauwe steen		•••		•		
Super graniet			•••	•		
Tile cutter						•••
Speed cutter						••
Porcellanato gres	••	•••		•••		••
US-530						
Beton standard	••	••	••	••		
Beton super	••	•	••			
HS-530						
W5TS						
ASX8						
Beton (floor saw)						
Beton (wall saw)						
Bleu						
Rouge						
Premium						
Duster		•	•	•	•	
Prelium dubbel						
Rapcol					•••	
Multi cutter		••	••	••		
ID10						
ID20						
ID33 IDK33						
ID80 IDK80						
ID67						
ID F1						
ID F2						
Vision						
ID 85						
ID86						

Sawblades	Glazed tiles	Plastic tubes	Stainless steel	Steel	Thin steel & tubes	Metalstud profiles
Laser beton		•				
Laser allround		•			•	
Silicaat		•				
Ligne 2000		•				
Laser uni						
Uni blitz						
Laser marathon						
ECO						
Turbo cool	•	•			•	
Turbo premium		•			•	
Turbo flange						
W2B						
Vacuum brazed		••	•		••	•
Duo complete		•••				
M3S						
Blauwe steen						
Super graniet						
Tile cutter	••	•				•
Speed cutter	•••					
Porcellanato gres	•••					
US-530						
Beton standard		•				
Beton super						
HS-530						
W5TS						
ASX8						
Beton (floorsaw)						
Beton (wallsaw)						
Bleu						
Rouge						
Premium						
Duster						
Prelium dubbel						
Rapcol						
Multi cutter						
ID10			•••	•	•	•
ID20			•	•	••	•••
ID33 IDK33				••	••	•
ID80 IDK80				•••	•••	•
ID67			•	••	••	
ID F1			•	••	••	
ID F2			••	•••	•••	
Vision			•	••	•••	
ID 85				•••	••	
ID86			•••		•••	

Images and specifications subject to change and printing errors.
All machines are delivered without diamond wheel.
SDS-plus and SDS DI are brand names of Robert Bosch.
Copyright KYOCERA SENCO Netherlands BV, Pascallaan 88,
8218 NJ Lelystad, The Netherlands
©2018 KYOCERA SENCO Netherlands BV

InterDiamant - Emiel van der Steenenstraat 3 - 1600 Sint-Pieters Leeuw - Belgium
T + 32 2 378 37 00 - F + 32 2 378 37 21 - info@interdiamant.be - www.interdiamant.be